
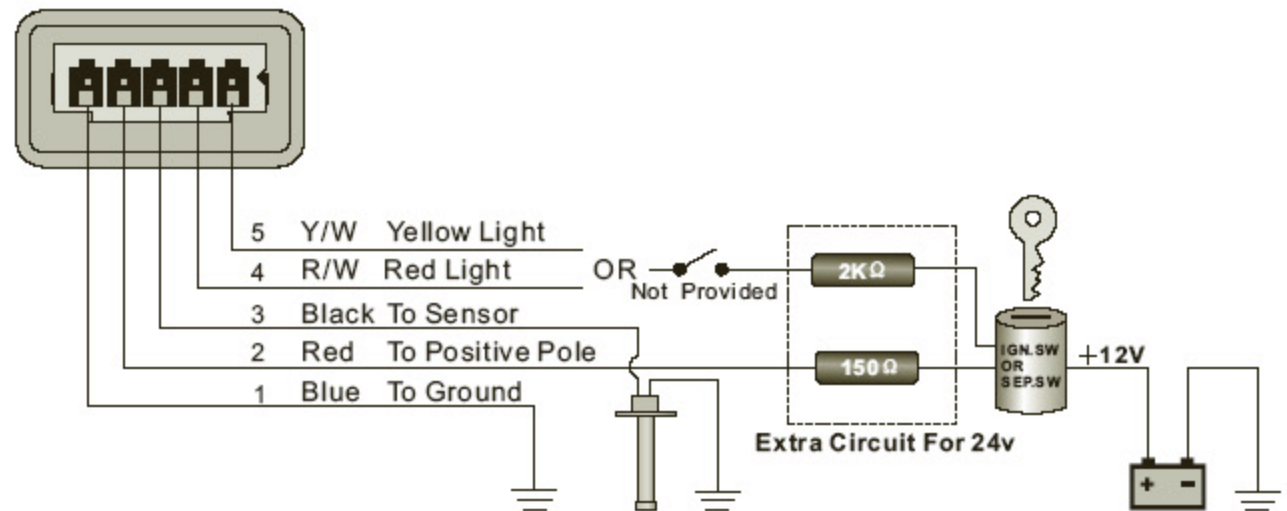


1	Blue	Blå	Blau	Bleu	Azul	蓝色
2	Red	Rød	Rot	Rouge	Rojo	红色
3	Black	Svart	Schwarz	Noir	Negro	黑色
4	Red/White	Rød/Hvit	Rot/Weiss	Rouge/Blanc	Rojo/Blanco	红/白
5	Yellow/White	Gul/Hvit	Gelb/Weiss	Jaune/Blanc	Amarillo/Blanco	黄/白

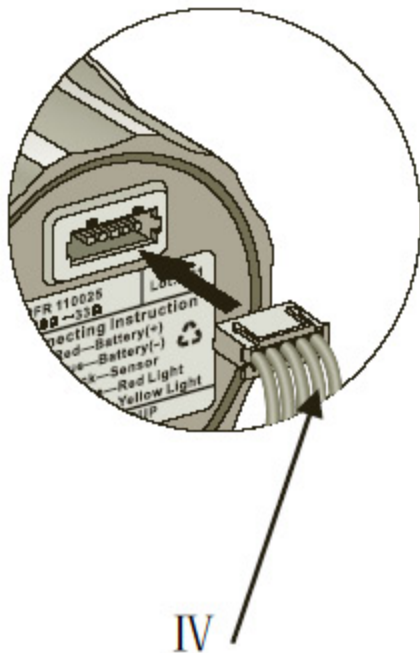

INSTALLATION STEPS

1. Cut a 52mm (2 1/16") diameter panel hole (II). You will need a minimum clearance of 55mm (2 3/16") behind the panel to fit the gauge.
2. Remove fastening ring (I). There is an alignment tab on the gauge body (III), place the gauge in the panel hole and mark the position of this tab to correctly align the gauge.
3. Insert gauge through panel from the front, fit and tighten fastening ring (I) from the rear.
4. Connect wires according to wiring instruction. Note the use of dropping resistors for 24V circuit. Select either Red or Yellow wires with white traces for backlighting. Wire colour corresponds with backlight colour.
5. Insert wire harness (IV) into port at the back of the gauge.
6. Please note, if the gauge is a voltmeter there is no black wire or resistors in the kit.